

# GILL

3-Axis Wind Speed & Direction Sensors



[gillinstruments.com](http://gillinstruments.com)

Gill Instruments has over twenty-five years experience in air flow measurement using ultrasonic technology and is a world leader in the field of wind measurement and weather monitoring. Gill offers the most extensive range of ultrasonic wind speed and direction sensors on the market today.

With headquarters in Lymington, UK, Gill supplies products globally, both direct and through an extensive network of distributors.



# WindMaster

## 3 Dimensional Wind Speed & Direction Sensors for Meteorological & Industrial Applications

The Gill WindMaster range of 3-axis ultrasonic anemometers provide a range of head configurations (omni-directional or C clamp) constructed in either stainless steel or aluminium/carbon fibre. The customer may select a variety of options including analogue inputs & outputs, data rates up to 32Hz and optional 65m/s measurement range.

### WindMaster

The Gill WindMaster is a lightweight, precision 3D anemometer, offering Sonic Temperature, Speed of Sound and U,V & W vector outputs at 20Hz (32Hz option). This 3D anemometer has an aluminium/carbon fibre construction and will monitor wind speeds up to 45m/s.

<b>Wind Speed Range</b>	45m/s (100mph)
<b>Output Rate</b>	20Hz*
<b>Construction</b>	Aluminium and Carbon Fibre
<b>Operational Temp</b>	-40°C to +70°C
<b>Weight</b>	1.0kg (35oz)

\*32Hz Option available




### WindMaster *PRO*

The WindMaster Pro uses the same precision, omni-directional 3D measurement technology as the standard WindMaster, with an increased wind measurement range of 0-65m/s (0-145mph), 32Hz output as standard and a robust stainless-steel external construction especially suited for marine applications.

<b>Wind Speed Range</b>	65m/s (145mph)
<b>Output Rate</b>	32Hz
<b>Construction</b>	Stainless Steel
<b>Operational Temp</b>	-40°C to +70°C
<b>Weight</b>	1.7kg (50oz)

### WindMaster *HS*

The WindMaster HS provides all of the advantages of the research grade HS measurement head design with the ease and feature set from the Gill WindMaster range. The horizontal head design allows for highly accurate vertical flow analysis with minimal interruption from the anemometer geometry.

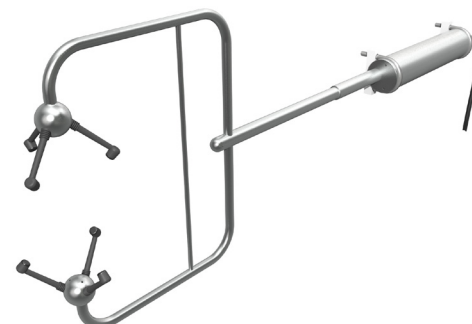

<b>Wind Speed Range</b>	45m/s (100mph)	<b>Wind Speed Resolution</b>	0.001 m/s
<b>Output Rate</b>	32Hz	<b>Weight</b>	2.96kg (104.4oz)
<b>Construction</b>	Stainless Steel	<b>Analogue inputs</b>	Optional
<b>Operational Temp</b>	-40°C to +70°C	<b>Analogue outputs</b>	Optional

The Gill Research range of 3-axis ultrasonic anemometers is particularly suited to applications such as fine scale Eddy Covariance or trace gas dispersion analysis studies, as well as no compromise high speed aerodynamic flow pattern work. R3 and HS anemometers are available with 50Hz or 100Hz output rates and will provide U, V, W vector, sonic temperature & speed of sound outputs.



## Research **RANGE**

R3 professional 3D ultrasonic anemometers have an omni-directional head design, ideal for Eddy Covariance analysis and the study of turbulent air flows. R3 products will monitor wind speeds up to 45m/s and offer sonic temperature, speed of sound and U, V & W vector outputs, at an output rate of 50Hz for the R3-50 and 100Hz for the R3-100.

### **R3 50**

**Wind Speed Range**

45m/s (100mph)

**Output Rate**

50Hz

**Construction**

Aluminium and Carbon Fibre

**Operational Temp**

-40°C to +60°C

**Weight**

1.0kg (35oz)

### **R3 100**

45m/s (100mph)

100Hz

Aluminium and Carbon Fibre

-40°C to +60°C

1.0kg (35oz)

## HS **RANGE**

HS professional 3D ultrasonic anemometers have a unique horizontal head design that allows for a more accurate measurement of vertical flows with minimal interruption from the anemometer geometry. Featuring a built-in inclinometer for simple positioning of the instrument on a tower or mast. A separate electronic interface allows easy access to the PRT and 6 analogue inputs.

HS anemometers will monitor wind speeds of 0-45m/s, the HS-50 provides a sampling rate of 50Hz and the HS-100 provides a faster 100Hz sample rate.



### **HS 50**

**Wind Speed Range**

45m/s (100mph)

**Output Rate**

50Hz

**Construction**

Stainless Steel

**Operational Temp**

-40°C to +60°C

**Inclinometer**

Included

### **HS 100**

45m/s (100mph)

100Hz


Stainless Steel

-40°C to +60°C

Included

Gill 3-axis ultrasonic anemometers provide wind speed and direction data. 3-vector outputs are available (U, V, W), along with speed of sound and sonic temperature outputs.

Gill ultrasonic wind sensors are true solid-state devices and have no need for regular maintenance, making them the ideal choice for a wide range of applications, particularly those in hostile environments.

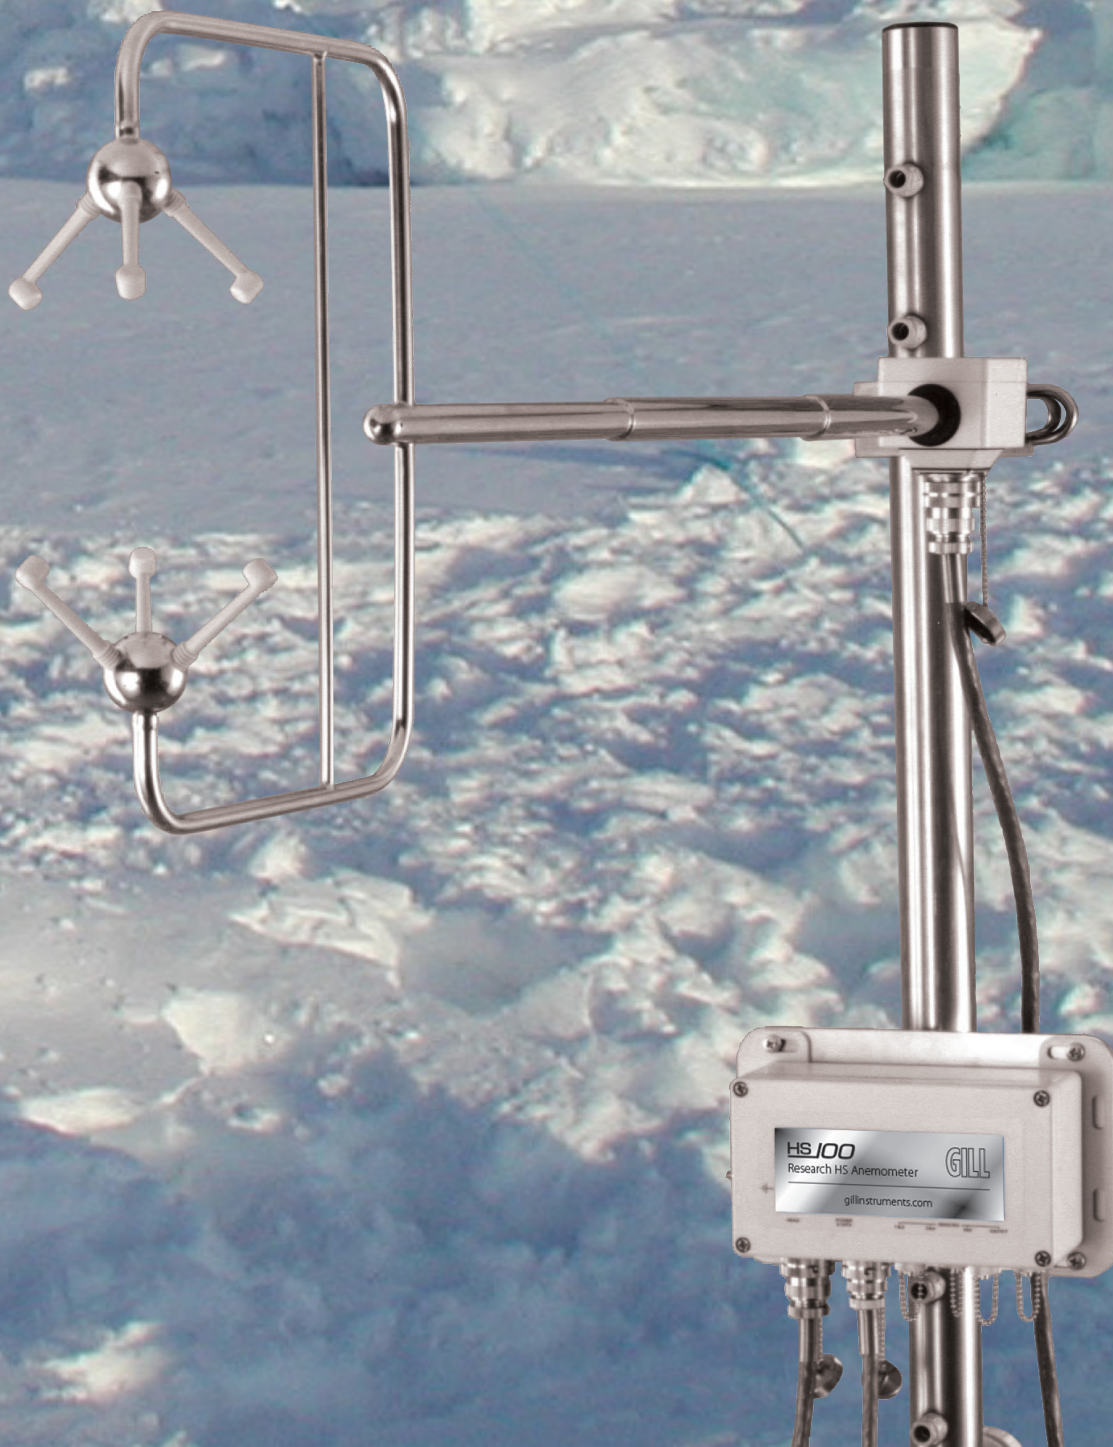

## **Gill Instruments Limited**

Saltmarsh Park  
67 Gosport Street  
Lymington  
Hampshire  
SO41 9EG UK  
Tel: +44 (0)1590 613 500  
Email: [anem@gillinstruments.com](mailto:anem@gillinstruments.com)



**[gillinstruments.com](http://gillinstruments.com)**

© Gill Instruments Limited.  
Gill® is a registered trademark of the Gill Group of Companies.

1561-0013 Iss 4